


# SO-LOW

## Blood Storage Refrigerators/Freezers

SETTING THE STANDARD IN EVERY LAB

- [Home Page](#)
- [Freezers to -85°C](#)
- [Freezers to -40°C](#)
- [Freezers to -20°C & -25°C](#)
- [Inventory Systems](#)
- [Accessories](#)
- [Lab & Pharmacy Freezers](#)
- [Lab & Pharmacy Refrigerators](#)
- [Blood Storage Refrig. / Freezers](#)
- [Chromatography Refrig.](#)
- [Flammable Material Storage](#)
- [Explosion Proof /Manual Defrost](#)
- [Undercounter Freezers / Refrig.](#)
- [Incubators / Ovens / Furnaces](#)
- [Waterbaths /Hotplates /Stirrers](#)
- [LN2 Cryogenic Storage Systems](#)
- [Walk-In Rooms](#)
- [Humidity Stability Chambers](#)

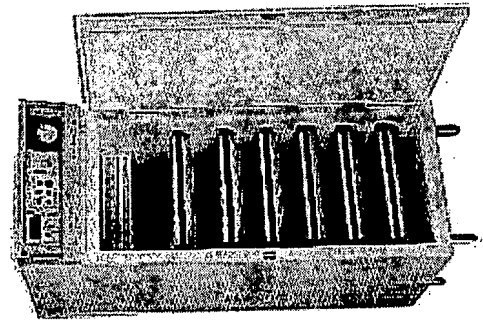

- KEY ON/OFF SWITCH - for secure operation
- LCD TEMPERATURE READOUT - highly visible and displaying °C scale in tenths of a degree. Easy to read and panel.
- CABINET WALLS - made of 22 gauge cold roll steel (ex gauge galvanized steel (interior) for lasting durability. Bo finished with high luster baked-enamel coatings. Insulation 3/8" (6cm) foamed-in-place urethane (CFC-Free) for more temperature control.
- DOUBLE-PANED TEMPERED GLASS DOORS - are controlled for reliable self closing. Keylocks provide additional security.
- 40-WATT FLUORESCENT INTERIOR LIGHT - provides lighting. External power control switch on control panel(s).
- DRAWERS - 6" Cantilever, 100% pullout, ball bearing
- 6" (15.2 cm) ADJUSTABLE LEGS - allow you to easily cabinet and make accommodating height adjustments.
- ADJUSTABLE THERMOSTAT
- EXPANSION VALVE REFRIGERANT CONTROL
- FIN & TUBE FORCED AIR CONDENSER/EVAPORATOR
- CYCLE DEFROST - defrost coils whenever the compressor is running. No heater or timer necessary.

*Note: All units meet the standard requirements of the A.A.B.B.*

- ALARM SYSTEM - features audio and visual signal for high and low temperature, door ajar, power loss, battery backup and remote contacts.
- TEMPERATURE RECORDER - offers a 6" dial, 7-day clock with stylus pen.
- CFC-FREE - refrigerant and insulation
- UL LISTED

### General Specifications

BLOOD STORAGE REFRIGERATORS				
MODEL NO.	CU. FT	TEMPERATURE RANGE	INTERIOR DIMENSIONS, INCHES, (CM) W x F-B x H	EXTERIOR DIMENSION INCHES (CM) W x F-B x H
<u>DHN4-5UCBBR</u>	5	4°C	23" x 19.5" x 22.88" (58 x 49 x 58)	27" x 25" x 34" (68 x 63 x 86)
<u>DHN4-24BBR</u>	24	1°C to 6°C	23.5" x 30" x 59" (59 x 76 x 150)	27.5" x 35.5" x 81.50" (69 x 90 x 207)
<u>DHN4-52BBR</u>	52	1°C to 6°C	51" x 30" x 59" (129 x 76 x 150)	55" x 35.5" x 80.375" (139 x 90 x 204)
BLOOD STORAGE FREEZERS				
<u>DHN30-5UCBBF</u>	5	-30°C	23" x 19.5" x 22.88" (58 x 49 x 58)	27" x 25" x 34" (68 x 63 x 86)
<u>DHN30-21BBF</u>	22.5	-30°C	23.5" x 28" x 59" (59 x 71 x 150)	27.5" x 34.875" x 82.75" (69 x 88 x 210)
<u>DHN30-48BBF</u>	48.8	-30°C	51" x 28" x 59" (129 x 71 x 150)	55" x 34.875" x 84.625" (139 x 88 x 215)

## So-Low Environmental Equipment Co., Inc.

10310 Spartan Drive

Cincinnati, Ohio 45215-1279 U.S.A.

513-772-9410 / Fax: 513-772-0570

e-mail address: [sales@so-low.com](mailto:sales@so-low.com)

So-Low Home Page | Sitemap | Contact Us  
 Ultra Low Freezers to -85°C | Laboratory Freezers to -40°C | Laboratory Freezers to -20°C & -25°C  
 Inventory Systems - Accessories | Laboratory & Pharmacy Freezers | Laboratory & Pharmacy Refrigerators  
 Blood Storage Refrigerators / Freezers | Chromatography Refrigerators | Flammable Material Storage  
 Explosion Proof / Manual Defrost | Undercounter Freezers / Refrigerators | Incubators / Ovens / Furnaces  
 Waterbaths / Hotplates / Stirrers